

# HELLA **VALUEFIT**

PROVEN QUALITY.  
GREAT PRICE.

SECOND  
EDITION



WORK LIGHTS  
AUXILIARY LIGHTS  
LED LIGHTBARS



# HELLA VALUEFIT – PROVEN QUALITY AT A GOOD PRICE.

HELLA VALUEFIT is a specific range designed exclusively to meet the requirements of customers in the free spare parts market. The products in this brand offer reliable quality at a fair market price.

It combines HELLA's decades of technological expertise with unique business skills. As a result, all the spare parts meet the relevant technical specifications and are safe and reliable and make lower cost repairs possible. What's more, there is no need to go without important services.

The HELLA VALUEFIT brand products offer you genuine added value.  
Buy proven quality at a good price – a smart move!






## Agricultural vehicles



## Construction machinery



## Trucks & trailers

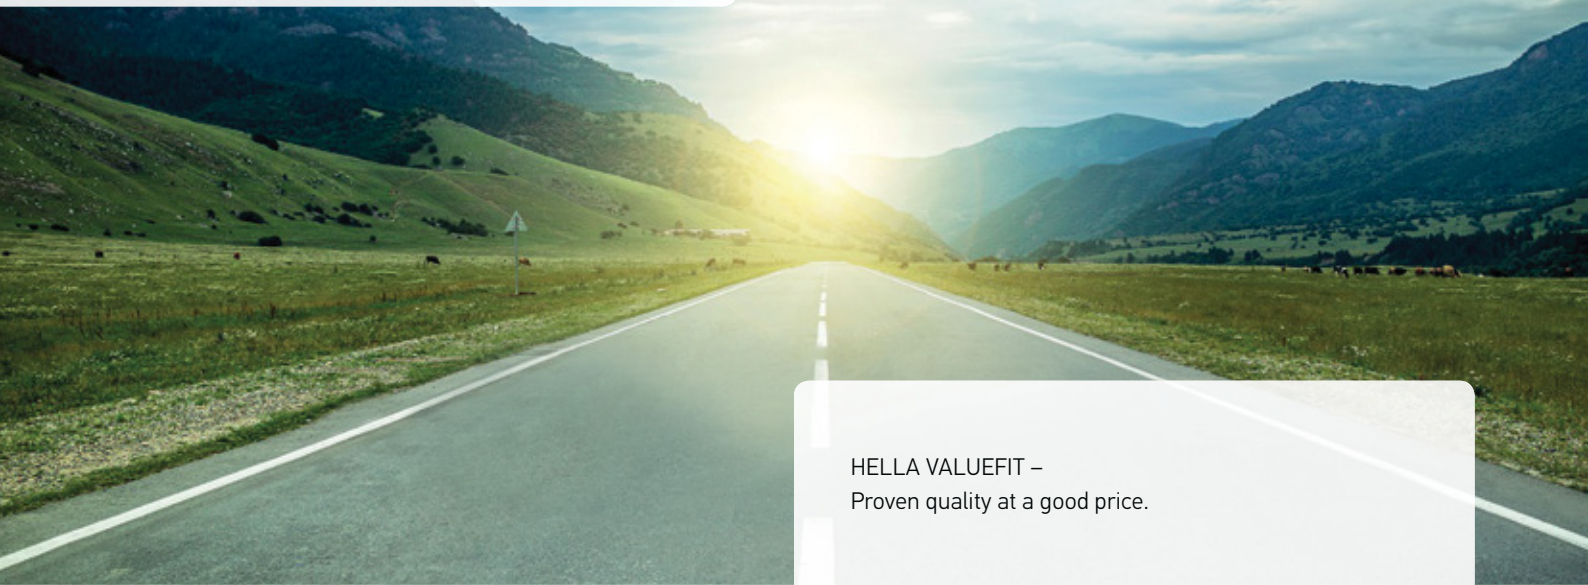

HELLA VALUEFIT –  
Proven quality at a good price.



# GET HELLA VALUEFIT ONLINE.

The new websites aimed both to the consumer and commercial vehicles presents products with features such as: LED, xenon and auxiliary halogen headlights, daytime running lamps, accessories, work lights and spotlights, plus additional information and downloads catalogs .

Get information, features, explanation of the technology used, the content of packaging, instructions, diagrams, beam, test data, accessories and installation instructions.


For drivers, use  
the following link:

[www.myhellalights.com](http://www.myhellalights.com)



For commercial vehicles and  
heavy duty, use the following link:

[www.hellahd.com](http://www.hellahd.com)

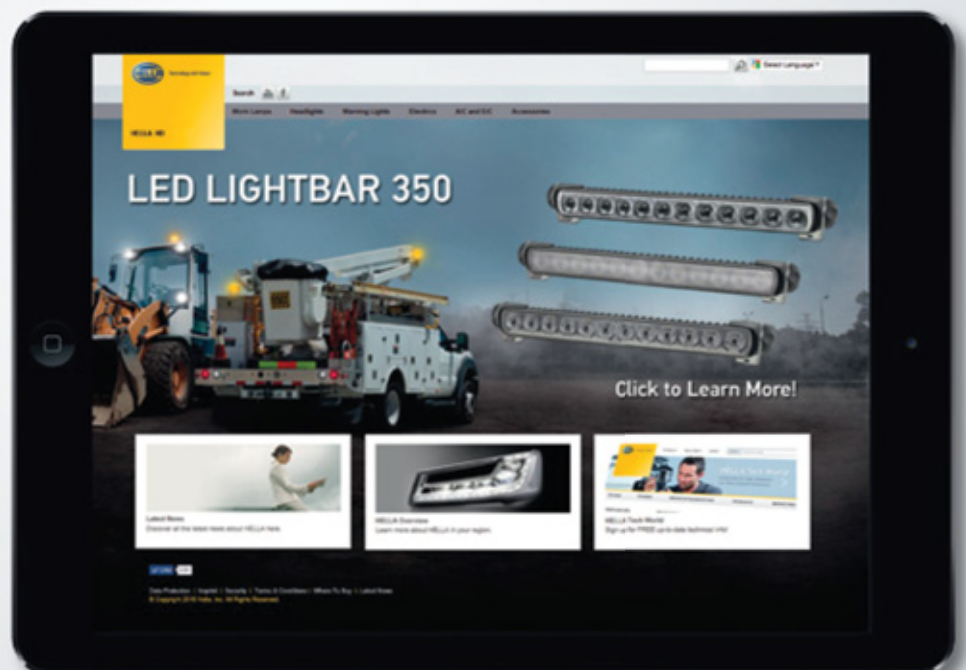





HELLA VALUEFIT –  
Applications for various tasks.



HELLA  
VALUEFIT

# HELLA VALUEFIT NORTHERN LIGHTS

## Innovative LED RGB lighting technology

- Control the color of your lights with your mobile phone and “LEDBLE” app
- Unique innovative RGB LED lighting
- Multivoltage 10-30 V
- Sturdy housing and brackets are made of metal





## PRODUCT RANGE

NEW



### ROCKER LED - Ambient light

- Specially developed for small installation spaces like wheel well or instep areas, this compact version features unique technology, that allows you to change ambient light color from your cell phone
- Via the "LEDBLE" app you can synchronize the rhythm of your music with the flash patterns of the lights.

### LED light controller

- Up to four or eight individual HELLA VALUEFIT Northern Lights can be connected.

### CUBE LED Spotlight

- Specially developed for small installation spaces, this compact cube spotlight features ambient lighting technology, that allows you to change ambient light color from your cell phone via app "LEDBLE"
- Via the app you can synchronize the rhythm of your music with the flash patterns of the lights.
- As a spotlight, the Northern Light LED Cube provides 410 measured lumens of white light.
- The housing and brackets are made of metal and are visually enhanced by an interchangeable accent color trim.


### LED Light Bars

- LED light bars are a stylish and effective way of adding visibility to where you are going HELLA VALUEFIT light bars come in different length, so you can chose the best option for you.
- Via the "LEDBLE" app you can synchronize the rhythm of your music with the flash patterns of the lights.
- The Northern Light Bar LED provides more than 2150 up to 4700 measured lumens of white light.

## LEDBLE APP

### Multifunction remote control solution

- Control the color of your lights with your mobile phone and app.
- Bluetooth® connection for IOS and Android
- Seamless color changing. Select any color you want together with flash patterns.
- Change colors in sync with the rhythm of your music
- App has on/off timer function

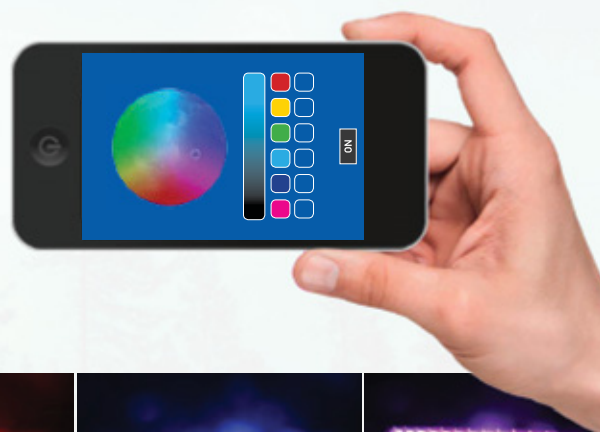

For more information, mounting instructions, videos and more, visit our website:

[www.myhellalights.com](http://www.myhellalights.com)

Download the  
App "LEDBLE"



ANDROID




IOS

## NORTHERN LIGHTS



412 lm

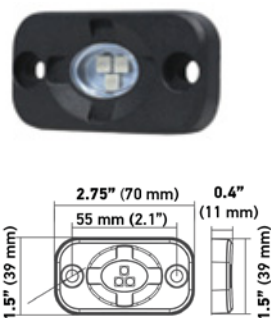

### Cube Series - Spot Beam

412 lm \*, type of protection: IP 67, 4 high power LEDs, die-cast aluminum housing, polycarbonate lens, comes with 4 color frames - black, red, yellow with blue installed

Voltage	Multivolt 10-30 VDC
Wattage	12 W
Temperature	6000 K for white light+RGB
Mounting	Metal plate bracket
Dimensions	3.1" W x 3" H x 2.9" D / 81 x 76 x 76mm
Part Number	<b>357212101</b> SINGLE (1 light, mounting instructions, no converter) <b>357212111</b> KIT (2 lights, 4x converter, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### Rocker Light Series

Type of protection: IP 67, 3 high power LEDs per Rocker light

Voltage	Multivolt 10-30 VDC
Wattage	0.2 W
Temperature	6000 K RGB
Mounting	Flush
Dimensions	2.75" W x 1.5" H x 0.4" D / 70 x 39 x 11mm
Part Number	<b>357212001</b> SINGLE (1 light, mounting instructions, no converter) <b>357212011</b> KIT (4 lights, 4x converter, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

### Combo Kit

Type of protection: IP 67, Two cube lights come with four color frames - black, red, yellow with blue installed, two light bars are both 12 LED / 8" - combo beam, four rocker lights, 8x converter included.

Voltage	Multivolt 10-30 VDC
Wattage	-
Temperature	60000 K
Mounting	Stainless steel mounting bracket
Dimensions	-
Part Number	<b>357212301</b> KIT (2) LED light bars, (2) LED Cube spotlight, (4) Rocker LED lights, (8) mounting brackets, (1) 1x8 light controller, (2) wiring harnesses with DT connector, switch 12 V, relay 12 V, 30 A fuse, (1) mounting instructions.



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

### 4x Controller

Used to connect up to 4 HELLA VALUEFIT Northern lights

Part Number	<b>357212401</b>
-------------	------------------



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

### 8x Controller

Used to connect up to 8 HELLA VALUEFIT Northern lights


Part Number	<b>357212411</b>
-------------	------------------



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

\* Actual lumens measured.

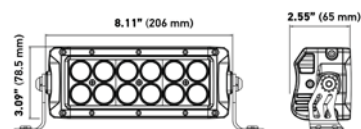

**1130 lm****Light Bar 12 LED / 8" - Combo Beam**

1130 lm\*, type of protection: IP 67, 12 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VDC
Wattage	18 W
Temperature	6000 K for white light + RGB
Mounting	Aluminum mounting bracket
Dimensions	8" W x 3.0" H x 2.5" D 206 x 78.5 x 65mm
Part Number	<b>357212201</b> SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).


**2152 lm****Light Bar 24 LED / 14" - Combo Beam**

2152 lm\*, type of protection: IP 67, 24 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VDC
Wattage	36 W
Temperature	6000 K for white light + RGB
Mounting	Aluminum mounting bracket
Dimensions	14" W x 3.0" H x 2.5" D 358 x 78.5 x 65mm
Part Number	<b>357212211</b> SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

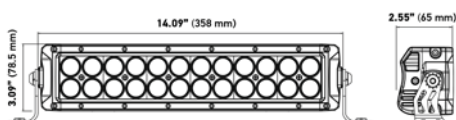
**3280 lm****Light Bar 40 LED / 22" - Combo Beam**

3280 lm\*, type of protection: IP 67, 40 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VDC
Wattage	60 W
Temperature	6000 K for white light + RGB
Mounting	Aluminum mounting bracket
Dimensions	22" W x 3.0" H x 2.5" D 563 x 78.5 x 65mm
Part Number	<b>357212221</b> SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

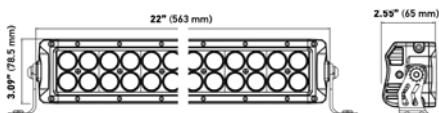
**3800 lm****Light Bar 60 LED / 32" - Combo Beam**

3800 lm\*, type of protection: IP 67, 60 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VDC
Wattage	90 W
Temperature	6000 K for white light + RGB
Mounting	Aluminum mounting bracket
Dimensions	32" W x 3.0" H x 2.5" D 818 x 78.5 x 65mm
Part Number	<b>357212231</b> SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

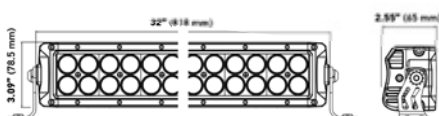
**4700 lm****Light Bar 96 LED / 50" - Combo Beam**

4700 lm\*, type of protection: IP 67, 96 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VDC
Wattage	144 W
Temperature	6000 K for white light + RGB
Mounting	Aluminum mounting bracket
Dimensions	50" W x 3.0" H x 2.5" D 1273 x 78.5 x 65mm
Part Number	<b>357212241</b> SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

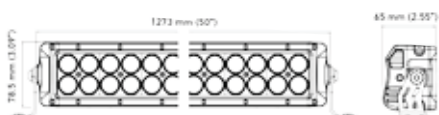

\* Actual lumens measured.

The features, specifications and availability of the product are subject to change without notice.






# EXCELLENT PERFORMANCE. UNDISPUTED VALUE.

The performance of LED Auxiliary lights is indisputable. Its high power LEDs provide a light intensity up to 15,000 lumens. The optical reflector provides optimum light distribution for off road applications. Its modern appearance and easy installation allow these auxiliary lights to be installed in virtually any area of your vehicle.

New

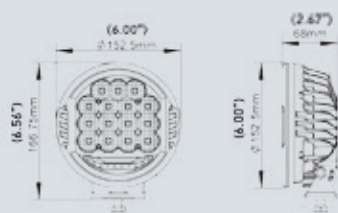

## 500 LED Driving Light

### Driving Light

2100 lm \*, compact, type of protection: IP 67  
15 high power LEDs, die-cast aluminum housing, polycarbonate lens.  
Striking LED accent light design, with effective heat dissipation via cooling ribs on the back of the housing  
Also available: amber stone shield (sold separately)

Voltage	Multivolt 10-30 VCD
Wattage	22.5 W
Temperature	6000 K
Mounting	Vertical
Connection	Cable 800 mm (single), DT connector (kit)
Dimensions	6" W x 6.56" H x 2.67" D / 152.5 x 166.75 x 68 mm
Part Number	<b>358117161</b> SINGLE (1 light, 1 stone shield black, mounting instructions) <b>358117171</b> KIT (2) LED driving lights, (2) mounting brackets and hardware, (2) stone shields, (1) relay, (1) wiring harness, (1) switch and mounting instructions.
Accessories	<b>358116991</b> SINGLE - amber stone shield


\* Actual lumens measured.



## AUXILIARY LIGHTS




600 lm

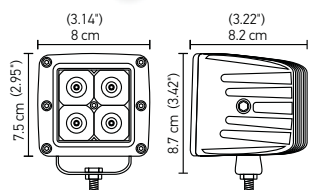


690 lm



600 lm



1000 lm

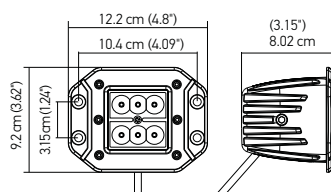

### Cube 4 LED Flood Lights

#### Flood Lights

600 lm \*, compact, type of protection: IP 67  
4 high power LEDs, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	12 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket / Upright
Dimensions	3.1" W x 3.4" H x 3.2" D / 80 x 75 x 82mm

#### Part Number

**357204831** KIT (2 lights, wiring harness with DT connector, fuse, relay, instructions, mounting hardware) - Black  
**357204031** SINGLE (1 light, mounting instructions) - Black  
**357204041** SINGLE (1 light, mounting instructions) - White



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### Cube 4 LED Spot Light

#### Spot Light

690 lm \*, compact, type of protection: IP 67  
4 high power LEDs, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	12 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket / Upright
Dimensions	3.1" W x 3.4" H x 3.2" D / 80 x 75 x 82mm

#### Part Number

**357204821** KIT (2 lights, wiring harness with DT connector, fuse, relay, instructions, mounting hardware)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

### Cube 6 LED White Flood Light

#### Flood Light

1000 lm \*, compact, type of protection: IP 67  
6 high power LEDs, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	18 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket / Upright
Dimensions	3.1" W x 3.4" H x 3.2" D / 80 x 75 x 82mm

#### Part Number

**357204051** SINGLE (1 light, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

### Cube 6 LED Flood Light

#### Flood Light

1000 lm \*, compact, type of protection: IP 67  
6 high power LEDs, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	18 W
Temperature	6000 K
Mounting	Flush
Dimensions	4.8" W x 3.6" H x 3.1" D / 122 x 92 x 80mm

#### Part Number

**357204021** SINGLE (1 light, mounting instructions)






This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

\* Actual lumens measured.



## AUXILIARY LIGHTS


**1080 lm**

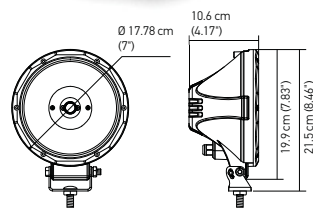**3000 lm**

**995 lm**

**995 lm**


### 7" LIGHT Driving Light SAE/ECE

#### Driving Light

1080 lm \*, compact, type of protection: IP 67  
 1 high power LED, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	20 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket / Upright
Dimensions	7.0" W x 7.0" H x 4.1" D / 178 x 178 x 106mm
<b>Part Number</b>	<b>357200001</b> SINGLE (1 light, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### 7" LIGHT Spot Light

#### Spot Light

3000 lm \*, compact, type of protection: IP 67  
 1 high power LED, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	30 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket / Upright
Dimensions	7.0" W x 7.0" H x 4.1" D / 178 x 178 x 106mm
<b>Part Number</b>	<b>357200011</b> SINGLE (1 light, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### 90mm Spot Light

#### Spot Light

995 lm \*, compact, type of protection: IP 67  
 6 high power LEDs, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	18 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket / Upright
Dimensions	3.5" W x 3.5" H x 2.2" D / 89 x 89 x 58mm
<b>Part Number</b>	<b>357201001</b> SINGLE (1 light, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### 90mm Spot Light Flush

#### Spot Light

995 lm \*, compact, type of protection: IP 67  
 6 high power LEDs, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	18 W
Temperature	6000 K
Mounting	Flush
Dimensions	4.8" W x 4.8" H x 2.3" D / 122 x 122 x 60mm
<b>Part Number</b>	<b>357201011</b> SINGLE (1 light, mounting instructions)




This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

\* Actual lumens measured.


## LIGHT BARS




1000 lm

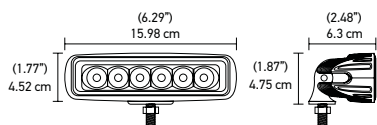


1000 lm

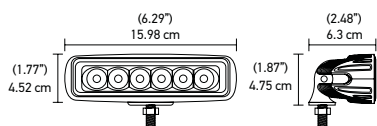

1000 lm

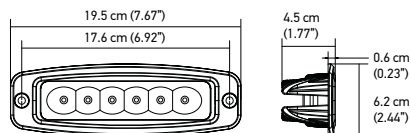

1850 lm

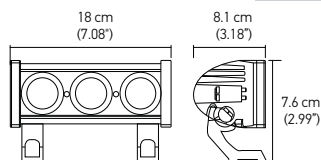

### Mini Lightbar 6 LED Flood Light

#### Mini Lightbar Flood Light

1000 lm \*, compact, type of protection: IP 67  
6 high power LEDs, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	18 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket / Upright
Dimensions	6.2" W x 1.7" H x 2.4" D / 160 x 45 x 63mm
Part Number	<b>357203001</b> SINGLE (1 light, mounting instructions) - Black <b>357203051</b> SINGLE (1 light, mounting instructions) - White



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### Mini Lightbar 6 LED Spot Light

#### Mini Lightbar Spot Light

1000 lm \*, compact, type of protection: IP 67  
6 high power LEDs, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	18 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket / Upright
Dimensions	6.2" W x 1.7" H x 2.4" D / 160 x 45 x 63mm
Part Number	<b>357203011</b> SINGLE (1 light, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

### Mini Lightbar 6 LED Flood Light Flush

#### Mini Lightbar Flood Light

1000 lm \*, compact, type of protection: IP 67  
6 high power LEDs, die-cast aluminum housing, polycarbonate lens.

Voltage	Multivolt 10-30 VCD
Wattage	18 W
Temperature	6000 K
Mounting	Flush
Dimensions	7.6" W x 2.4" H x 1.7" D / 195 x 62 x 45mm
Part Number	<b>357203031</b> SINGLE (1 light, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

### Modular Lightbar 3XL

#### Modular Lightbar 3XL

1850 lm \*, compact, type of protection: IP 67, 3 high power LEDs, magnesium-alloy housing, PMMA lens,  
More modules can be added through mounting bolts on either side and on top to create desired width and height

Voltage	Multivolt 10-30 VCD
Wattage	30 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket / Upright
Dimensions	7" W x 2.9" H x 3.1" D / 180 x 76 x 81mm
Part Number	<b>357205001</b> SINGLE (1 light, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

\* Actual lumens measured.



# HELLA VALUEFIT LBX SERIES


NEW


- 1 Combo Beam.** A combination of a spot beam and flood beam for the LBX-540 & LBX-720
- 2 Diecast Aluminum Housing** able to withstand the elements.
- 3 Aluminum Alloy Brackets** for sturdy upright mounting. A perfect fit for roof, grille and bumper mounting.
- 4** An all around professional LED light bar, a perfect fit for your next race to out shine the competition!



## Color Temperature

→ Color temperature is close to natural daylight.  
Drivers operating in such lighting conditions stay alert longer.

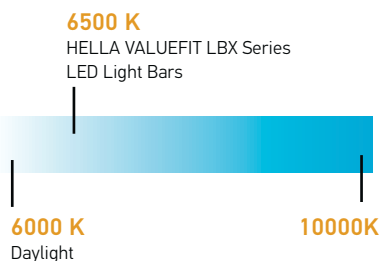

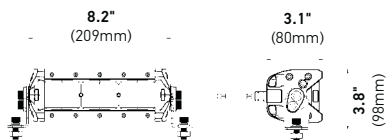
**1000 lm****LBX-220 LED Light Bar / 8"****LBX-220 LED Light Bar / 8"**

1000 lm \*, compact, type of protection: IP 67, integrated DT connector  
3 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 9-30 VCD
Wattage	22 W
Temperature	6500 K
Mounting	Stainless steel mounting bracket
Dimensions	8.2" W x 3.8" H x 3.1" D / 209 x 98 x 80mm
<b>Part Number</b>	<b>360000002</b> SINGLE (1 light bar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

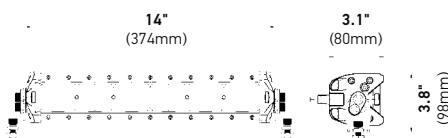
**2000 lm****LBX-380 LED Light Bar / 14"****LBX-380 LED Light Bar / 14"**

2000 lm \*, type of protection: IP 67, integrated DT connector  
6 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 9-30 VCD
Wattage	44 W
Temperature	6500 K
Mounting	Stainless steel mounting bracket
Dimensions	14" W x 3.8" H x 3.1" D / 374 x 98 x 80mm
<b>Part Number</b>	<b>360001002</b> SINGLE (1 light bar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

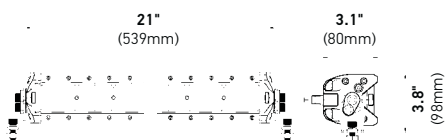
**3500 lm****LBX-540 LED Light Bar / 21" - Combo Beam****LBX-540 LED Light Bar / 21"- Combo Beam**

3500 lm \*, type of protection: IP 67, integrated DT connector  
9 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 9-30 VCD
Wattage	66 W
Temperature	6500 K
Mounting	Stainless steel mounting bracket
Dimensions	21" W x 3.8" H x 3.1" D / 539 x 98 x 80mm
<b>Part Number</b>	<b>360002002</b> SINGLE (1 light bar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

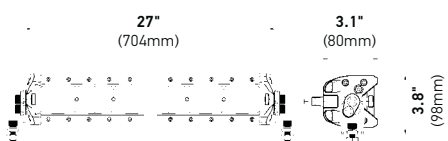**5500 lm****LBX-720 LED Light Bar / 27" - Combo Beam****LBX-720 LED Light Bar / 27"- Combo Beam**

5500 lm \*, type of protection: IP 67, integrated DT connector  
12 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 9-30 VCD
Wattage	88 W
Temperature	6500 K
Mounting	Stainless steel mounting bracket
Dimensions	27" W x 3.8" H x 3.1" D / 704 x 98 x 80mm
<b>Part Number</b>	<b>360003002</b> SINGLE (1 light bar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

\* Actual lumens measured.



# HELLA VALUEFIT SPORT SERIES

- 1 Combo Beam.** A combination of a spot beam and flood beam.
- 2 Diecast Aluminum Housing** able to withstand the elements.
- 3 Aluminum Alloy Brackets** for sturdy upright mounting. A perfect fit for roof, grille and bumper mounting.
- 4** Get that off-road look whether you're on the street or blazing the trails!



## Color Temperature

→ Color temperature is close to natural daylight.  
Drivers operating in such lighting conditions  
stay alert longer.



**6000 K**  
HELLA VALUEFIT Sport Series  
LED Light Bars

6000 K  
Daylight



## LIGHTBARS - SPORT SERIES



### Sport Series Light Bar 12 LED / 8" - Flood Beam

#### Light Bar 12 LED / 8" - Flood Beam


1200 lm \*, compact, type of protection: IP 67  
12 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VCD
Wattage	36 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket
Dimensions	8.1" W x 3.0" H x 3.4" D / 206 x 78.5 x 86.5mm

**Part Number** **357208001** SINGLE (1 lightbar, mounting instructions) - Black  
**357208011** SINGLE (1 lightbar, mounting instructions) - White



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

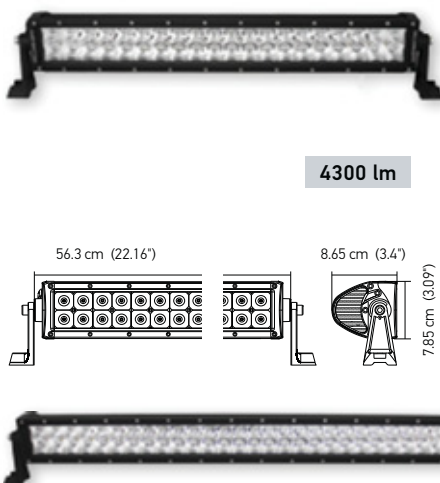

### Sport Series Light Bar 40 LED / 22" - Combo Beam

#### Light Bar 40 LED / 22" - Combo Beam


4300 lm \*, compact, type of protection: IP 67  
40 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VCD
Wattage	120 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket
Dimensions	22.1" W x 3.0" H x 3.4" D / 558 x 76 x 86mm

**Part Number** **357208101** SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

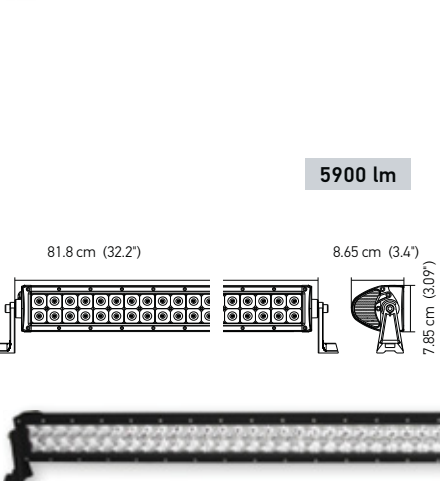

### Sport Series Light Bar 60 LED / 32" - Combo Beam

#### Light Bar 60 LED / 32" - Combo Beam


5900 lm \*, compact, type of protection: IP 67  
60 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VCD
Wattage	180 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket
Dimensions	32.2" W x 3.0" H x 3.4" D / 812 x 76 x 86mm

**Part Number** **357208201** SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

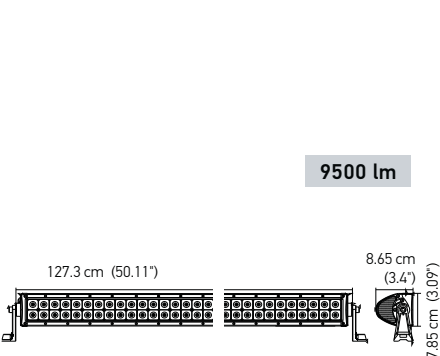

### Sport Series Light Bar 96 LED / 50" - Combo Beam

#### Light Bar 96 LED / 50" - Combo Beam

9500 lm \*, type of protection: IP 67  
96 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VCD
Wattage	288 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket
Dimensions	50" W x 3.0" H x 3.4" D / 1270 x 76 x 86mm

**Part Number** **357208301** SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

\* Actual lumens measured.



# HELLA VALUEFIT DESIGN SERIES

- 1 Combo Beam.** A combination of a spot beam and flood beam
- 2 Diecast Aluminum Housing** able to withstand the elements.
- 3 Aluminum Alloy Brackets** for sturdy upright mounting. A perfect fit for roof, grille and bumper mounting.
- 4 Sleek low profile design** for a discreet lighting solution!



## Color Temperature

→ Color temperature is close to natural daylight.  
Drivers operating in such lighting conditions  
stay alert longer.




**6000 K**  
HELLA VALUEFIT Design Series  
LED Light Bars



## LIGHTBARS - DESIGN SERIES



**3000 lm**

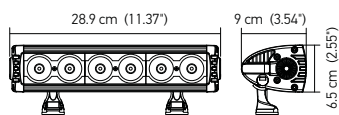

### Design Series Light Bar 6 LED / 11" - Combo Beam

#### Light Bar 6 LED / 11" - Combo Beam

3000 lm \*, compact, type of protection: IP 67  
6 high power LEDs, die-cast aluminum housing, polycarbonate lens


Voltage	Multivolt 10-30 VCD
Wattage	60 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket
Dimensions	11.3" W x 2.5" H x 3.5" D / 289 x 65 x 90mm
Part Number	<b>357209001</b> SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



**5500 lm**

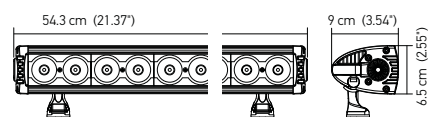

### Design Series Light Bar 12 LED / 21" - Combo Beam

#### Light Bar 12 LED / 21" - Combo Beam

5500 lm \*, compact, type of protection: IP 67  
12 high power LEDs, die-cast aluminum housing, polycarbonate lens


Voltage	Multivolt 10-30 VCD
Wattage	120 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket
Dimensions	21.3" W x 2.5" H x 3.5" D / 543 x 65 x 90mm
Part Number	<b>357209101</b> SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).



**8500 lm**

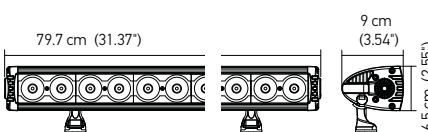

### Design Series Light Bar 18 LED / 31" - Combo Beam

#### Light Bar 18 LED / 31" - Combo Beam

8500 lm \*, compact, type of protection: IP 67  
18 high power LEDs, die-cast aluminum housing, polycarbonate lens


Voltage	Multivolt 10-30 VCD
Wattage	180 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket
Dimensions	31.3" W x 2.5" H x 3.5" D / 797 x 65 x 90mm
Part Number	<b>357209201</b> SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).



**14500 lm**

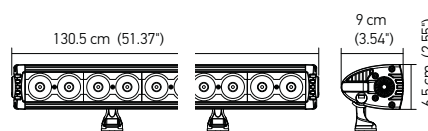

### Design Series Light Bar 30 LED / 51" - Combo Beam

#### Light Bar 30 LED / 51" - Combo Beam

14500 lm \*, compact, type of protection: IP 67  
30 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VCD
Wattage	300 W
Temperature	6000 K
Mounting	Stainless steel mounting bracket
Dimensions	51.3" W x 2.5" H x 3.5" D / 1305 x 65 x 90mm
Part Number	<b>357209301</b> SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

\* Actual lumens measured.




# HELLA VALUEFIT PRO SERIES

- 1 **Combo Beam.** A combination of a spot beam and flood beam
- 2 **Diecast Aluminum Housing** able to withstand the elements.
- 3 **Aluminum Alloy Brackets** for sturdy upright mounting. A perfect fit for roof, grille and bumper mounting.
- 4 An all around professional LED light bar, a perfect fit for your next race to out shine the competition!



## Color Temperature


- Color temperature is close to natural daylight.
- Drivers operating in such lighting conditions stay alert longer.

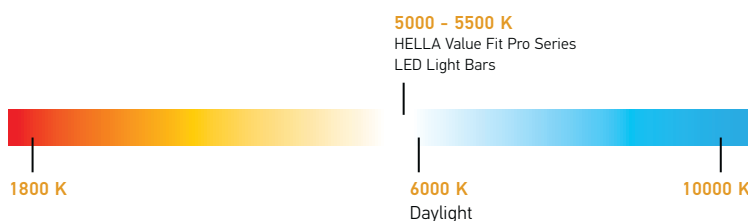

## LIGHTBARS - PRO SERIES



3100 lm

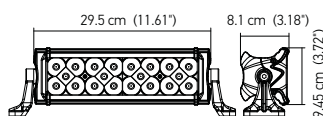

### Pro Series Light Bar 20 LED / 12" - Spot Beam

#### Light Bar 20 LED / 12" - Spot Beam

3100 lm \*, compact, type of protection: IP 67  
20 high power LEDs, die-cast aluminum housing, polycarbonate lens


Voltage	Multivolt 10-30 VCD
Wattage	60 W
Temperature	5500 K
Mounting	Stainless steel mounting bracket
Dimensions	11.6" W x 3.7" H x 3.1" D / 295 x 96 x 81mm
Part Number	357210001 SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



5500 lm

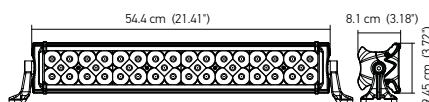

### Pro Series Light Bar 40 LED / 21" - Combo Beam

#### Light Bar 40 LED / 21" - Combo Beam

5500 lm \*, compact, type of protection: IP 67  
40 high power LEDs, die-cast aluminum housing, polycarbonate lens


Voltage	Multivolt 10-30 VCD
Wattage	120 W
Temperature	5500 K
Mounting	Stainless steel mounting bracket
Dimensions	21.4" W x 3.7" H x 3.1" D / 544 x 96 x 81mm
Part Number	357210101 SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).



9250 lm

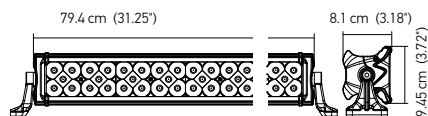

### Pro Series Light Bar 60 LED / 31" - Combo Beam

#### Light Bar 60 LED / 31" - Combo Beam

9250 lm \*, compact, type of protection: IP 67  
60 high power LEDs, die-cast aluminum housing, polycarbonate lens


Voltage	Multivolt 10-30 VCD
Wattage	180 W
Temperature	5500 K
Mounting	Stainless steel mounting bracket
Dimensions	31.2" W x 3.7" H x 3.1" D / 794 x 96 x 81mm
Part Number	357210201 SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).



15500 lm

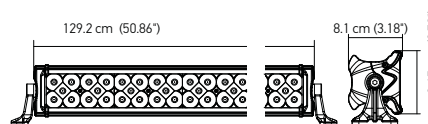

### Pro Series Light Bar 100 LED / 51" - Combo Beam

#### Light Bar 100 LED / 51" - Combo Beam

15500 lm \*, compact, type of protection: IP 67  
100 high power LEDs, die-cast aluminum housing, polycarbonate lens

Voltage	Multivolt 10-30 VCD
Wattage	300 W
Temperature	5500 K
Mounting	Stainless steel mounting bracket
Dimensions	50.8" W x 3.7" H x 3.1" D / 1292 x 96 x 81mm
Part Number	357210301 SINGLE (1 lightbar, mounting instructions)



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

\* Actual lumens measured.






# HIGH PERFORMANCE. A HIGHER VALUE.

Focus is placed on round and square-shaped LED worklights. The clear lens with reflector optics makes the compact LED work lights particularly attractive from a design perspective. High-power LEDs provide a light intensity of up to 1,200 lumens. All our LED work lights are submersible (IP 67) and tested to the ECE-R10 standard.

## WORKLIGHTS



700 lm

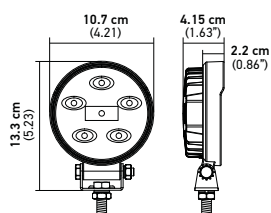

### 5RD LED Worklight

#### 5RD LED Worklight

700 lm \*, flat and compact, type of protection: IP 67(sumergible)  
6 high power LEDs, die-cast aluminum housing, PC lens with optical disperser, protection against reverse polarity, CEE 10 (CEM)


Voltage	Multivolt 9 – 33 VDC
Wattage	9 W
Mounting	Stainless steel mounting bracket
Dimensions	4.2" W x 5.2" H x 1.6" D / 133 x 107 x 41.5mm
Part Number	<b>357108001</b> Close range, box



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



1000 lm



### 5RD LED 1.0 Worklight

#### 5RD LED 1.0 Worklight

1000 lm \*, flat and compact, type of protection: IP 67(sumergible)  
9 high power LEDs, die-cast aluminum housing, PC lens with optical disperser, protection against reverse polarity, CEE 10 (CEM)

Voltage	Multivolt 9 – 33 VDC
Wattage	15 W
Mounting	Stainless steel mounting bracket
Dimensions	4.2" W x 5.2" H x 1.6" D / 133 x 107 x 41.5mm
Part Number	<b>357101002</b> Close range, blister pack <b>357100002</b> Long range, blister pack




This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).



1700 lm

2000 lm



### 5RD LED 2.0 Worklight

#### 5RD LED 2.0 Worklight

2000 lm \*, flat and compact, type of protection: IP 67(sumergible)  
14 high power LEDs, die-cast aluminum housing, PC lens with optical disperser, protection against reverse polarity, CEE 10 (CEM)

Voltage	Multivolt 9 – 33 VDC
Wattage	24 W
Mounting	Stainless steel mounting bracket
Dimensions	4.4" W x 5.4" H x 1.8" D / 133 x 107 x 41.5mm
Part Number	<b>357105002</b> Close range, blister pack <b>357105012</b> Long range, blister pack <b>358115371</b> Close range, blister pack, amber - 1700 lm



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).

\* Actual lumens measured.



## WORKLIGHTS



### 4SQ LED Worklight

#### 4SQ LED Worklight

700 lm \*, flat and compact, type of protection: IP 67(sumergible)  
 6 high power LEDs, die-cast aluminum housing, PC lens with optical disperser, protection against reverse polarity, CEE 10 (CEM)

Voltage	Multivolt 9 – 33 VDC
Wattage	9 W
Mounting	Stainless steel mounting bracket
Dimensions	3.9" W x 3.9" H x 1.5" D / 100 x 100 x 40mm
Part Number	<b>357107001</b> Close range, box



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



### 4SQ LED 1.0 Worklight

#### 4SQ LED 1.0 Worklight

1000 lm \*, flat and compact, type of protection: IP 67(sumergible)  
 9 high power LEDs, die-cast aluminum housing, PC lens with optical disperser, protection against reverse polarity, CEE 10 (CEM)

Voltage	Multivolt 9 – 33 VDC
Wattage	13 W
Mounting	Stainless steel mounting bracket
Dimensions	3.9" W x 3.9" H x 1.5" D / 1100 x 100 x 40mm
Part Number	<b>357103002</b> Close range, blister pack <b>357102002</b> Long range, blister pack



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



### 4SQ LED 2.0 Worklight

#### 4SQ LED 2.0 Worklight

2000 lm \*, flat and compact, type of protection: IP 67(sumergible)  
 14 high power LEDs, die-cast aluminum housing, PC lens with optical disperser, protection against reverse polarity, CEE 10 (CEM)

Voltage	Multivolt 9 – 33 VDC
Wattage	24 W
Mounting	Stainless steel mounting bracket
Dimensions	4.2" W x 5.4" H x 1.8" D / 108 x 139 x 48mm
Part Number	<b>357106002</b> Close range, blister pack <b>357106012</b> Long range, blister pack



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

\* Actual lumens measured.

# WORKLIGHTS



2700 lm



## RC360 Remote Controlled Worklight

### RC360 Remote Controlled Worklight

Remotely controlled LED worklight, full rotation of 360 ° by 360 °, polycarbonate lens  
Flash function, magnetic mount - fixed, cable 4.5 m (15 ft) with cigarette lighter connector  
Contains: 1 LED Headlamp and remote control, instruction manual and installation components.  
2700 lm. \*9 high power LEDs, Light Pattern: Long Range

Voltage	Multivolt 10 – 30 VDC
Wattage	90 W
Mounting	Magnetic or fixed mounting (upright only)
Dimensions	7.8" W x 8" H x 7.3" D / 199 x 205 x 189mm
Part Number	<b>530040333</b> Black <b>530040334</b> White <b>530040335</b> Replacement remote control



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



## 2 LED BLU Worklight

### 2 LED BLU Worklight

300 lm \*, spot light, compact.  
2 high power LEDs, die-cast aluminum housing, PC lens with optical disperser.  
Ideal for forklifts, It provides visual warning for pedestrians,  
Bright blue light beam spot projected on the floor

Voltage	Multivolt 10 – 80 VDC
Wattage	6 W
Mounting	Stainless steel mounting bracket
Dimensions	4.3" W x 2.4" H x 2.3" D / 110 x 61 x 60mm
Part Number	<b>530040329</b>



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www. P65Warnings.ca.gov).



\* Actual lumens measured.



## ACCESSORIES



**For single light**

### Wire Harness for Single Light

#### Cable harness connector ATP, relay 12 V, 12 V switch and fuse 30 A..

Perfect for HELLA FIT VALUE auxiliary lamps and light bars.

This harness is suitable for connecting any auxiliary headlamp whose consumption energy does not exceed 300 W at 12V. Any misuse can be dangerous. Be sure to disconnect the negative (-) battery before installation to avoid a short circuit.

Voltage	12 VCD
Wattage	300 W
Electric connection	1 ATP Connector
Mounting	-
Medidas	1 x cable with a length of 10ft / 315 cm 1 x cable fuse 1.5ft / 45 cm in length 1 x switch cable length 6.4ft / 195 cm
<b>Part Number</b>	<b>357211001</b>



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



**For two lights**

### Wire Harness for Two Lights

#### Cable harness with 2 connectors DT, 12V relay, 12 V switch and 30 A fuse.

Perfect for HELLA FIT VALUE auxiliary lamps and light bars.

This harness is suitable for connecting any auxiliary headlamp whose consumption energy does not exceed 300W 12V. Any misuse can be dangerous. Be sure to disconnect the negative (-) battery before installation to avoid a short circuit.

Voltage	12 VCD
Wattage	300 W
Electric connection	2 DT Connectors
Mounting	-
Medidas	2 x cables with 10ft / 315 cm long 1 x cable fuse 1.5ft / 45 cm in length 1 x switch cable length 6.4ft / 195 cm
<b>Part Number</b>	<b>357211011</b>



This product can expose you to chemicals including Di(2-ethylhexyl) phthalate (DEHP), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



# GET FREE TECHNICAL TRAINING

## HELLA TECH WORLD

Prepare your automobile garage for the future. At HELLA TECH WORLD you will find all our technical expert knowledge in the fields of lighting, electrical, electronic, thermal management, brake systems and vehicle diagnostics. And best of all this content is available 24/7 for you and your customers for FREE!

Register today and start to acquire the knowledge that will give you a real advantage and competitive edge for greater success!

**REGISTER TODAY FOR FREE!**



Scan this QR code from your Smartphone or Tablet to enter.

Visit:

**[www.hella.com/techworld](http://www.hella.com/techworld)**

### Multiple tools available:



**Know-how Tool**



**Technical Information**



**HELLA Online Training**





# DIGITAL SERVICES

This section is devoted to helping visitors navigate to the correct sites according to the individual needs of original equipment and aftermarket automotive, as well as distributors, dealers and professional workshops.

PORTALS	
Web site + PDF's	<a href="http://www.hellausa.com">www.hellausa.com</a>
HELLA PAGID	<a href="http://www.hella-pagid.com">www.hella-pagid.com</a>
BEHR HELLA SERVICE	<a href="http://www.behrhellaservice.com">www.behrhellaservice.com</a>
HELLA MARINE	<a href="http://www.hellamarine.com">www.hellamarine.com</a>
MICROSITES	
Auxiliary lights, horns, bulbs, DTRL, wiper blades	<a href="http://www.myhellalights.com">www.myhellalights.com</a>
Optilux range	
Work lights, relays, warning lights, etc.	<a href="http://www.hellahd.com">www.hellahd.com</a>
High Carbon Rotors & Brakes	<a href="http://www.highcarbonrotors.com">www.highcarbonrotors.com</a>
90 mm Headlights configurator	<a href="http://www.hella.com/90mm-modules">www.hella.com/90mm-modules</a>
Eliver - auxiliary lights	<a href="http://www.hella.com/eliver">www.hella.com/eliver</a>
Agriculture	<a href="http://www.hella.com/agro">www.hella.com/agro</a>
Buses	<a href="http://www.hella.com/bus">www.hella.com/bus</a>
ONLINE CATALOGS	
Universal parts catalog	<a href="http://www.hella.com/upc">www.hella.com/upc</a>
Vehicles specific parts	<a href="http://www.partcat.com/hella">www.partcat.com/hella</a>
Brake Systems	<a href="http://www.brakeguide.com">www.brakeguide.com</a>
TECHNICAL INFORMATION	
HELLA TECH WORLD	<a href="http://www.hella.com/techworld">www.hella.com/techworld</a>
Aftermarket Club	<a href="http://www.hellausa.com/amc">www.hellausa.com/amc</a>
APPS FOR SMARTPHONES AND TABLETS	
<a href="http://www.hella.com/apps">www.hella.com/apps</a>	
	
Horns	Auxiliary lights
	
Work lights	BrakeGuide
	
	Compressors

#### SOCIAL MEDIA

Facebook	<a href="http://www.facebook.com/hellausa">www.facebook.com/hellausa</a>
	<a href="http://www.facebook.com/hellamining">www.facebook.com/hellamining</a>
Facebook	<a href="http://www.facebook.com/hellamarine">www.facebook.com/hellamarine</a>
	<a href="http://www.facebook.com/hellapagid">www.facebook.com/hellapagid</a>
YouTube	<a href="http://www.youtube.com/myhellalights">www.youtube.com/myhellalights</a>

#### APPLICATION DATA

Mapping of information

#### ACES 3.1

(Aftermarket Catalog Exchange Standard)

#### PIES

(Product Information Exchange Standard)

#### Digital Assets

(Images)

	OPTI CAT	EPICORE	WHI	DCI	SDC
Name of Product Line	Code	Code	Code	Code	Code - Under HELLA, Inc.
HELLA Light Bulbs	HELLA BULBS	HES	HLA	Only bulbs and wiper blades	HELLA
HELLA Lighting for Specific Vehicles	HELLA ALL NO BULBS	HES	HLA		HELLA
HELLA Fuel Pumps	HELLA ALL NO BULBS	HEV	HLA		HELLA
HELLA Windshield Wipers	HELLA ALL NO BULBS	HEM	HLA		HELLA
HELLA Electronics	HELLA ALL NO BULBS	HEP	HLA		HELLA
Hella Pagid Brake Systems	HELLA HPBS	HEA	HPD		HPBS
Behr Hella Service	HELLA BHS	BHS	BHS		BHS
Pierburg	HELLA PIERBURG	PGP	PIG		Pierburg
Behr Thermot-tronik	HELLA BTT	BTT	BEH		BTT
Optilux	HELLA OPTILUX	OPL	HLA	Optilux Lighting	Optilux



**HELLA, Inc.**

201 Kelly Drive  
Peachtree City, GA, 30269  
Tel.: +1 (877) 224-3552  
Fax: +1 (770) 631-7574  
[www.hellahd.com](http://www.hellahd.com)  
[www.myhellalights.com](http://www.myhellalights.com)

**HELLAMEX, S.A. de C.V.**

Carretera México Querétaro Km 30,  
Bodega 2B y Barranca Honda,  
San Martín Obispo, Cuautitlán Izcalli,  
Edo. de México. C.P. 54763  
Tel. Ventas: +52 (55) 5321-1390  
Servicio Técnico: 01 800 221-0471  
[hellamex@hella.com](mailto:hellamex@hella.com)  
[www.hellamex.com](http://www.hellamex.com)

**HELLA do Brasil Automotive Ltda.**

Rua Bom Pastor, 2224 - 15º andar  
São Paulo, SP  
04203-002 Brasil  
Telefone: +55 (11) 2627-7800  
[info.brasil@hella.com](mailto:info.brasil@hella.com)  
[www.hella-brasil.com](http://www.hella-brasil.com)

© HELLA Inc.  
08.2016 #H04202021